



ADROIT FIRE

CLEVER FIRE SOLUTIONS

K-TYPE

HFX-500

DATA SHEET



HFX-500

MODEL NAME :	HFX-500
GROSS WEIGHT :	3950 gr ±%3
CHEMICAL WEIGHT :	500 gr. POTASSIUM NITRATE
COOLING SECTION WEIGHT :	1000 gr. ±%5 (PRP:%99 Al ₂ O ₃ , 10mm Ø Melting Point 2050°C)
HIGH TEMPERATURE INSULATION FELT :	5 pcs. 3mm(d),(1800°C)
DIMENSIONS :	100 x 100 x 243 (in mm.)
MARKING METHOD :	Screen Printing(Serigraph)
CASING MATERIAL :	STAINLESS STEEL/PAINTED STEEL

APPROVALS



TS ISO 15779



ISO 15779

CE 2806

TS EN 15276

BS EN 15276 (BSI KITEMARK)

MED - IMO MSC.1/Circ.1270 (WHEELMARK)

UN ECE R107 (E MARK)

ATEX (EX-PROOF MARK)



TS EN 15276



ATEX



UNECE-R107



0437/24



bsi Aerosol Fire Extinguishers KITEMARK™




DISCHARGE CHARACTERISTICS OF HAFEX CONDENSED AEROSOL GENERATORS

MODEL NAME	75°C DISTANCE (m)	200°C DISTANCE (m)	400°C DISTANCE (m)	DISCHARGE TIME (sec)
HFX - 500	0.45	0.15	-	5-7

WALL INSTALLATION

HFX-500 WALL INSTALLATION


- 1. AEROSOL BODY
- 2. HANGING APPARATUS
- 3. IGNITER/ACTIVATOR
- 4. SCREW
- 5. NUT BOLT
- 6. BOLT
- 7. INSTALLATION WALL

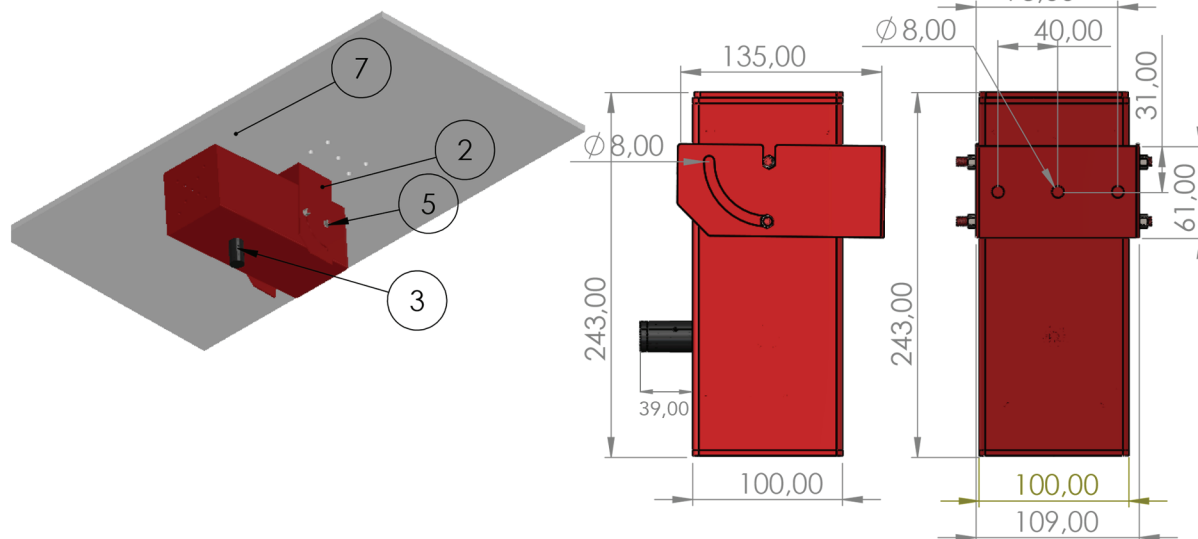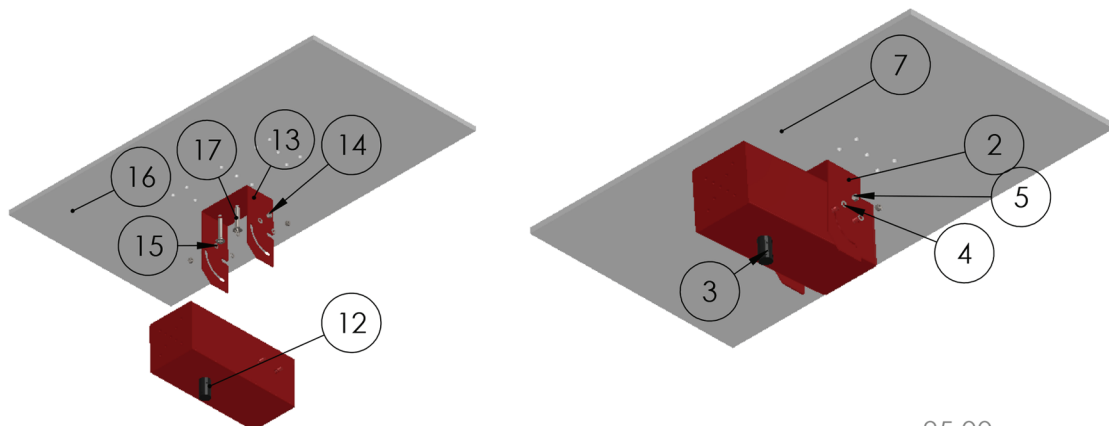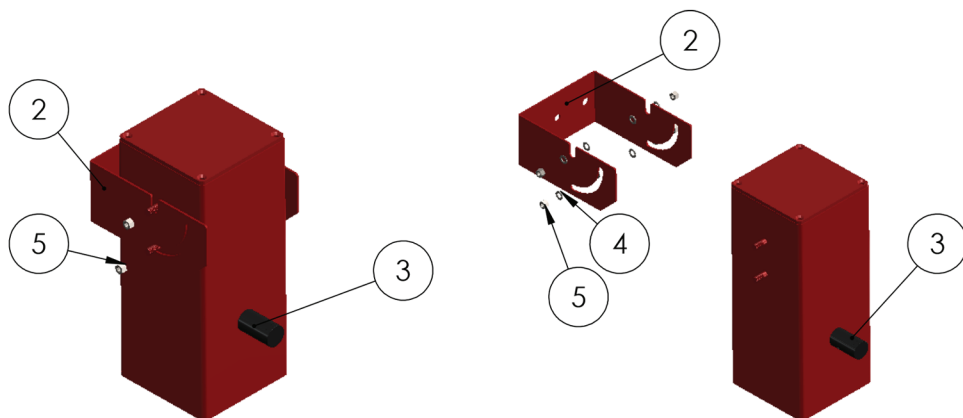


CEILING INSTALLATION

HFX-500 CEILING INSTALLATION


- | | |
|----------------------|----------------------|
| 1. AEROSOL BODY | 6. BOLT |
| 2. HANGING APPARATUS | 7. INSTALLATION WALL |
| 3. IGNITER/ACTIVATOR | |
| 4. SCREW | |
| 5. NUT BOLT | |

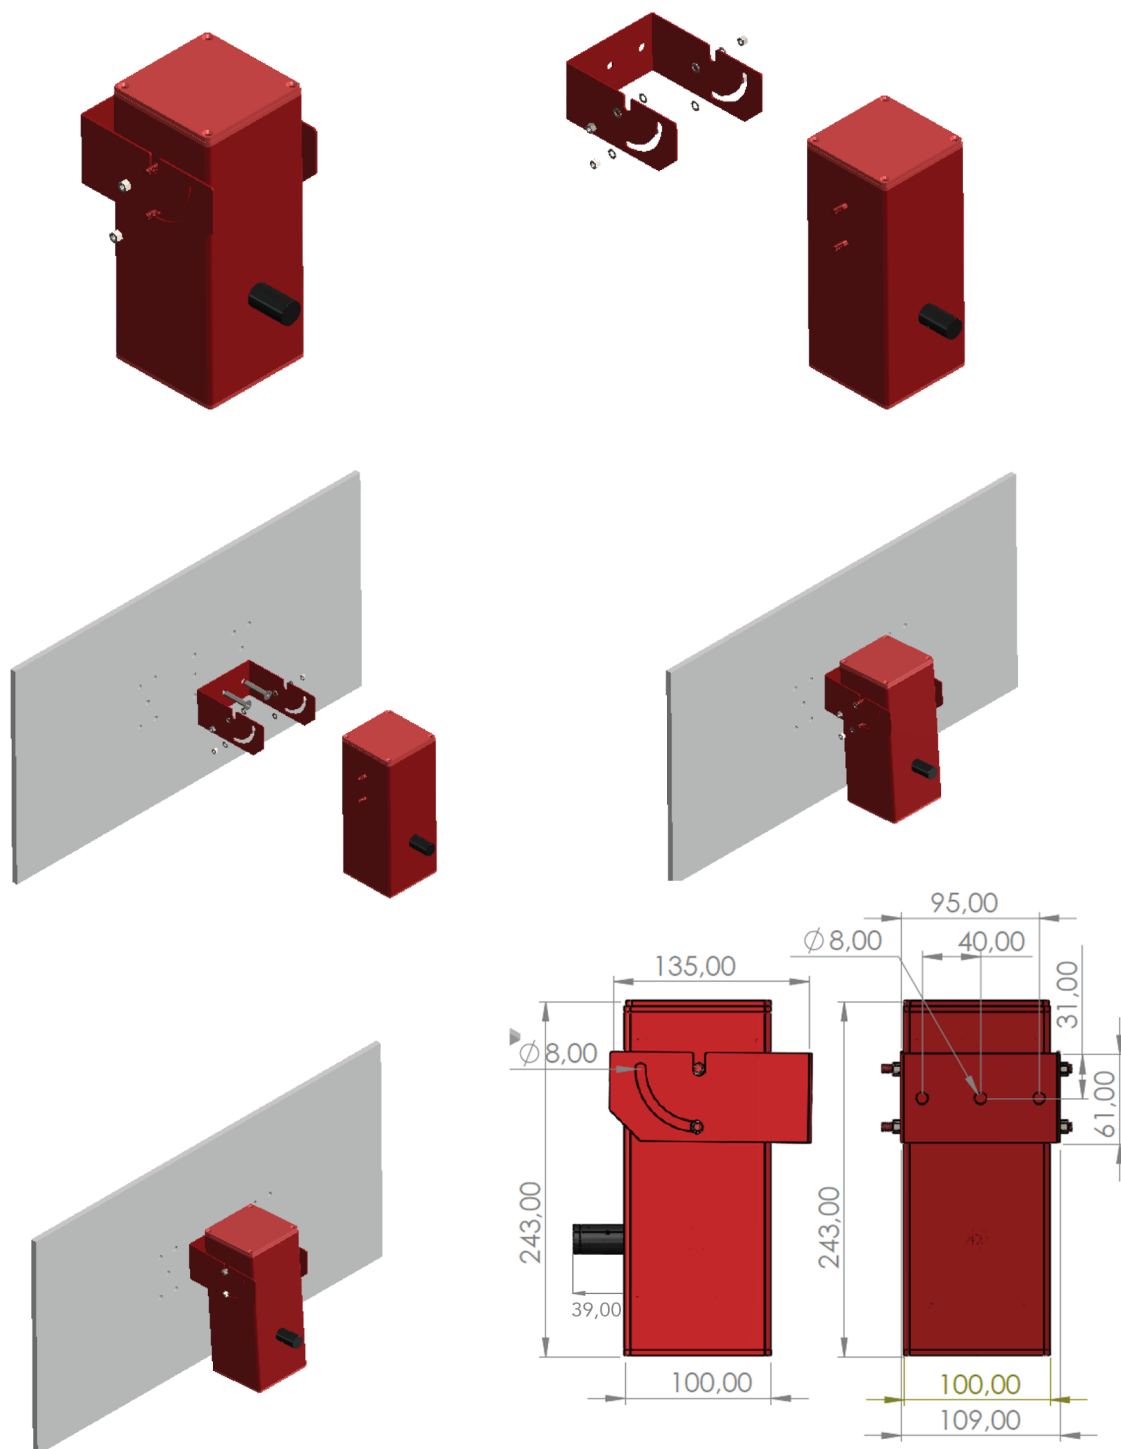


ANGLE OPTIONS

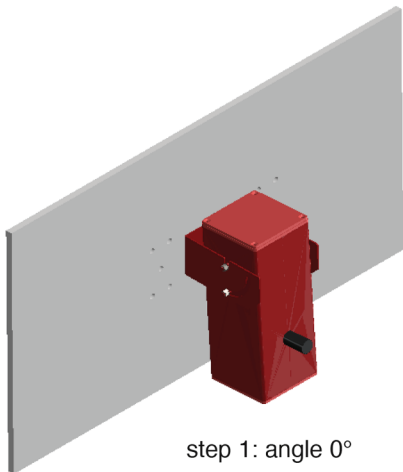


step 1: angle 0°

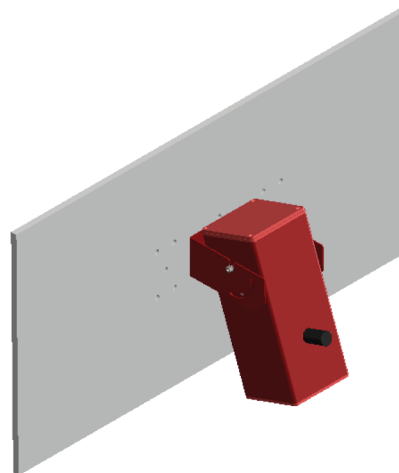


step 2: angle 22,5°

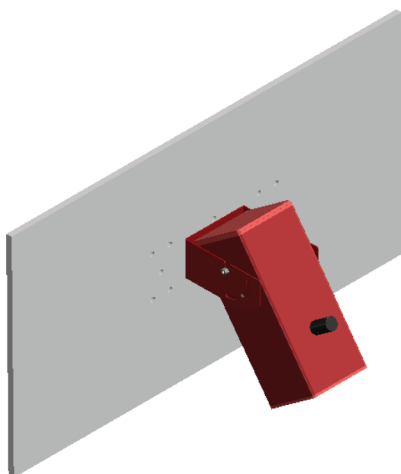

step 3: angle 45°

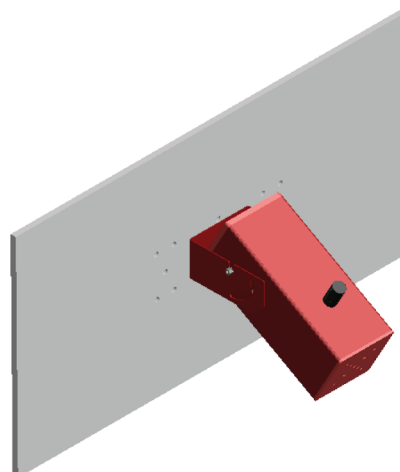

step 4: angle 67,5°

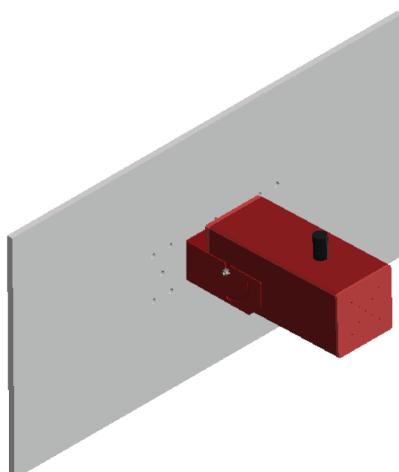

step 5: angle 90°

WARNING: IF THE ANGLE OF THE DISCHARGE PATH IS REQUIRED TO BE CHANGED, REMOVE THE SCREWS THEN TURN THE AEROSOL BODY TO THE CORRECT ANGLE AND TIGHTEN THE SCREWS WHICH WERE REMOVED.



ADROIT FIRE

Adroit Fire

Fire Suppression Technology
T/a Adroit Fire
Fairlawn
Firbank Lane
Woking
Surrey
GU21 7QS
UK

+44 1483 766855

+44 7721 666566

info@adroitfire.com

paul@adroitfire.com